# F-801M_J(-C)

## Modular Ice Machine
## Slim-Line Series

F-801M_J(-C)
08/03/23
Item # 13037

Item #: _____

Project: _____

Qty: _____

AIA#: _____

**W x D x H**
**22" x 27 3/8" x 26"**

Shipping Dimensions
32" x 26 1/2" x 32"

**F-801MAJ** ★
Air-Cooled Flaker

**F-801MWJ**
Water-Cooled Flaker

**F-801MAJ-C** ★
Air-Cooled Cubelet

**F-801MWJ-C**
Water-Cooled Cubelet

★ ENERGY STAR



## Features

- **Durable stainless steel exterior**
- **Advanced CleanCycle24™ design** (ADVANCED 24 CleanCycle)
- **Stainless steel auger with greaseless bearing**

- Flaker - Up to 751 lbs. of ice production per 24 hours
- Cubelet - Up to 690 lbs. of ice production per 24 hours
- Mount two units, side-by-side, in only 44" of floor space for double the amount of ice production
- 2 second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Infrared bin control for easy cleaning and reliability
- R-404A Refrigerant

**Available on Bins:**

| | | | | |
|---|---|---|---|---|
| B-250SF | B-500SF | B-800SF | B-1150SS | B-1500SS* |
| B-300SF | B-700SF | B-900SF | B-1300SS | B-1650SS* |

*Top kit may be required. See Bin Spec Sheets. *Two unit application only.*

**Warranty:**
3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


Shipping: (LxWxH) 32" x 26.5" X 32" Volume: 15.7ft³

| | | ICE PRODUCTION | | WATER USAGE | | ELECTRICAL | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Condenser | Model | Air / Water Temp Lbs. per 24 hours 70°/ 50°F | 90°/ 70°F | Potable Gal. per 100 lbs. 90°/ 70°F | Condenser Gal. per 100 lbs. 90°/ 70°F | kWh Used per 100 lbs. 90°/ 70°F | Min. Circuit/ Max. Fuse Size | Amperage | Voltage | Circuit Wires (including ground) | Heat Rejection BTU/hr. | Refrigerant Charge Amount | Net / Ship Weight (lbs.) |
| Air | F-801MAJ | 751 | 566 | 12.0 | N/A | 4.5 | 15A | 11.8A | 115V/60/1 | 3 | 5,900 | 1 lbs. 12 oz. | 176 / 205 |
| Water | F-801MWJ | 680 | 605 | 12.0 | 119 | 3.9 | 15A | 11.8A | 115V/60/1 | 3 | 6,200 | 10.6 oz. | 176 / 205 |
| Air | F-801MAJ-C | 690 | 532 | 12.0 | N/A | 5.0 | 15A | 11.8A | 115V/60/1 | 3 | 5,000 | 1 lbs. 12 oz. | 176 / 205 |
| Water | F-801MWJ-C | 632 | 580 | 12.0 | 120 | 4.13 | 15A | 11.5A | 115V/60/1 | 3 | 6,000 | 10.6 oz. | 176 / 205 |


*Power cord not included. Must be hard-wired at site.*

## Cube Dimensions*

**Flaked** F-801MAJ




**Cubelet** F-801MAJ-C




* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear and sides, and 24" (61 cm) clearance at top for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com


# F-801M_J(-C)

**Modular Ice Machine**
**Slim-Line Series**

F-801M_J(-C)
08/03/23
Item # 13037


mm
[inch]

## FRONT VIEW

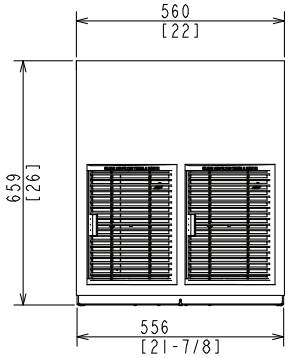



AIR-COOLED
WATER-COOLED

## SIDE VIEW

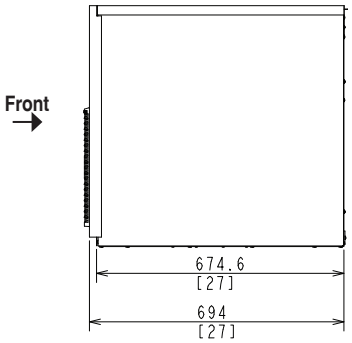



AIR-COOLED
WATER-COOLED

## REAR VIEW

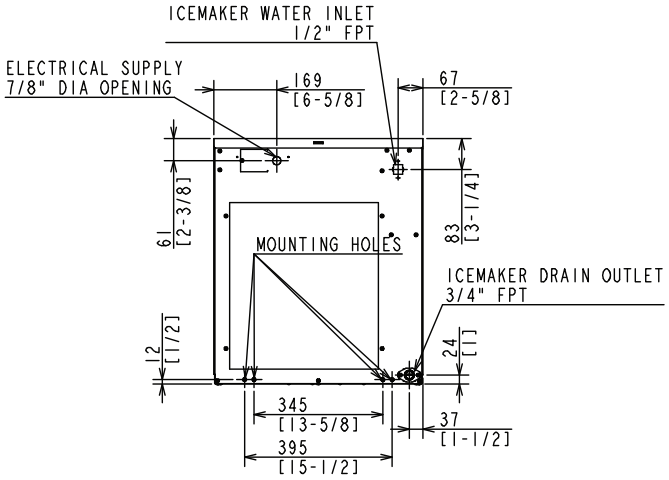



AIR-COOLED

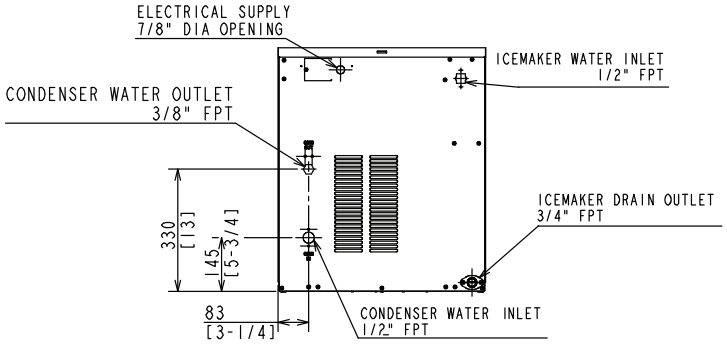


WATER-COOLED

## BOTTOM VIEW

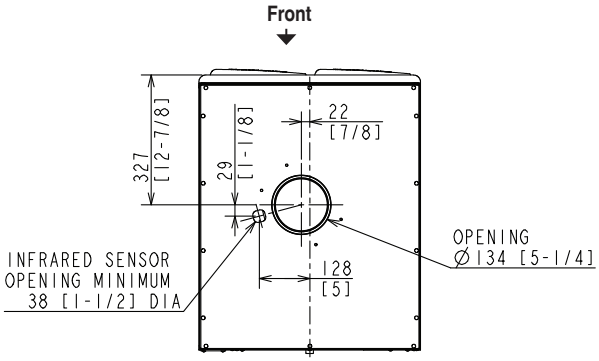


AIR-COOLED
WATER-COOLED