

Mobile Self-Leveling Cabinets

Heated - Stainless Steel



Model 6209

Models

6100, 6105, 6106, 6107, 6108, 6109, 6110, 6111, 6112
 6200, 6205, 6206, 6207, 6208, 6209, 6210, 6211, 6212
 6300, 6305, 6306, 6307, 6308, 6309, 6310
 6400, 6405, 6406, 6407, 6408, 6409, 6410

Easy Field Adjustment For Plate Dispensing Height Without Tools

Benefits

- Reduce breakage
- Easy to clean and sanitize
- Rolls to where dispensing is needed

Features

- All welded stainless steel construction
- Dispensers are field adjustable for dispensing level without tools
- Separate thermostatic heat controls for each dispenser

Casters

- Heavy-duty 4" plate-mount, 2 each with brake



Specifications

Mobile Cabinet: Mobile cabinets are all-welded stainless steel construction. Cabinets have 18-gauge top and 20-gauge sides and bottom and include bottom corner bumpers. Cabinet bottom has center clean out hole. Casters are 4" (102 mm) diameter extra-load swivel (two with locking brake). Unit features a heavy-duty independent undercarriage frame of galvanized steel to which casters are mounted. Unit is NSF listed.

Dispenser Tubes: Dispenser tubes are of welded stainless steel construction and drop into mobile cabinet top openings. Dispensers hang from cabinet opening by an 18-gauge flange ring, and feature three each 22-gauge vertical side supports welded to 20-gauge bottom plate. Self-leveling dish carriage shall be of welded stainless steel construction and travels vertically in dispenser tube with nylon guides for smooth operation. Carriage has 22-gauge removable dish platform. Dispensers feature flange mounted perimeter extension springs, which are detachable from the dish carriage to provide adjustment without tools for different weight dishes. Each dispenser has a vertical stacking capacity of 25" (635 mm).

Heating Unit: Unit is 120 VAC 60 Hz and has a 6' (1829 mm) coiled power supply cord with 5-15P NEMA plug (5-20P on Models 6409 and 6410) for 120 VAC. Cabinet has interior mounted electrical junction box with twist-lock receptacles for individual power to each dispenser. Dispenser tubes are fully enclosed in 22-gauge stainless steel, and have a circular bottom mounted 300 or 450 watt heater element. Heating system features thermostatic control for each dispenser tube in a tamper-protective location with safe high-end shut off. Control has infinite settings between low and high temperature cut-outs. Thermostat is field adjustable for average interior air temperature between 100° F (38° C) and 175° F (79° C) at middle adjustable thermostatic setting. On-off switch and power indicator light are located on top flange of each dispenser. Average dish temperature rise of 40° F (22° C) above ambient is achieved within one hour of initial heating cycle at middle adjustable thermostatic setting. Cabinet and dispenser tubes are UL listed.

Spec. #

AIA #

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.elakeside.com/foodservice


Mobile Self-Leveling Cabinets

Models

6100, 6105, 6106, 6107, 6108, 6109, 6110, 6111, 6112
 6200, 6205, 6206, 6207, 6208, 6209, 6210, 6211, 6212
 6300, 6305, 6306, 6307, 6308, 6309, 6310
 6400, 6405, 6406, 6407, 6408, 6409, 6410

Heated - Stainless Steel

AutoCAD drawings available through KCL CADalogo

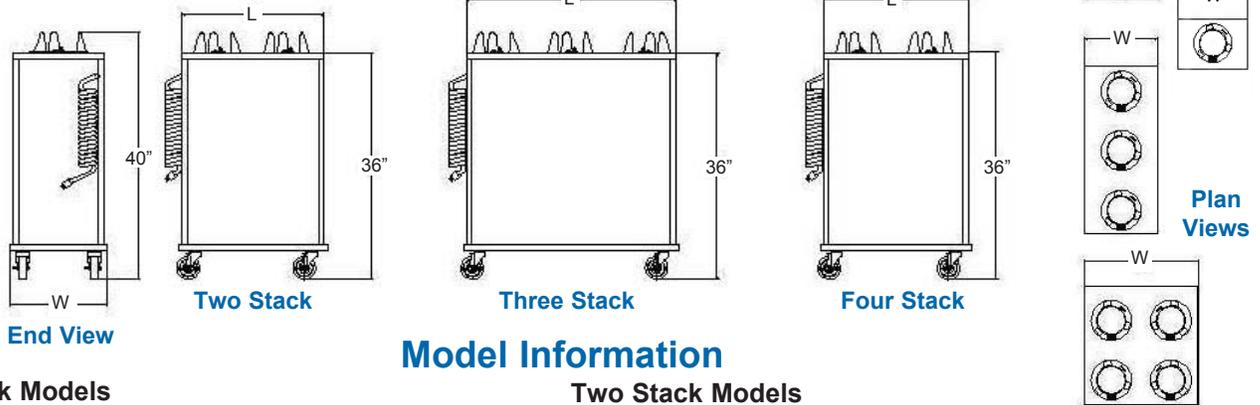

Model Information

Single Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical		Ship Weight
		W	L	H	Watts	Amps	
6100	Up to 5" (127)	18½" (470)	22½" (571)	40" (1013)	300	2.5	93 (42.1 kg)
6105	5-1/8" to 5-3/4" (130 to 146)	18½" (470)	22½" (571)	40" (1013)	300	2.5	93 (42.1 kg)
6106	5-7/8" to 6-1/2" (149 to 165)	18½" (470)	22½" (571)	40" (1013)	300	2.5	95 (42.8 kg)
6107	6-5/8" to 7-1/4" (168 to 184)	18½" (470)	22½" (571)	40" (1013)	300	2.5	98 (44.1 kg)
6108	7-3/8" to 8-1/8" (187 to 206)	18½" (470)	22½" (571)	40" (1013)	300	2.5	105 (47.3 kg)
6109	8-1/4" to 9-1/8" (210 to 232)	18½" (470)	22½" (571)	40" (1013)	450	3.75	110 (49.5 kg)
6110	9-1/4" to 10-1/8" (235 to 257)	18½" (470)	22½" (571)	40" (1013)	450	3.75	115 (51.8 kg)
6111	10-1/4" to 11" (235 to 279)	18½" (470)	22½" (571)	40" (1013)	450	3.75	122 (51.8 kg)
6112	11-1/4" to 12-1/4" (260 to 311)	18½" (470)	22½" (571)	40" (1013)	450	3.75	122 (55.0 kg)

Two Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical		Ship Weight
		W	L	H	Watts	Amps	
6200	Up to 5" (127)	18½" (470)	32" (813)	40" (1013)	600	5.0	100 (45.2 kg)
6205	5-1/8" to 5-3/4" (130 to 146)	18½" (470)	32" (813)	40" (1013)	600	5.0	100 (45.2 kg)
6206	5-7/8" to 6-1/2" (149 to 165)	18½" (470)	32" (813)	40" (1013)	600	5.0	103 (46.7 kg)
6207	6-5/8" to 7-1/4" (168 to 184)	18½" (470)	32" (813)	40" (1013)	600	5.0	106 (48.1 kg)
6208	7-3/8" to 8-1/8" (187 to 206)	18½" (470)	32" (813)	40" (1013)	600	5.0	117 (53.1 kg)
6209	8-1/4" to 9-1/8" (210 to 232)	18½" (470)	32" (813)	40" (1013)	900	7.5	121 (54.9 kg)
6210	9-1/4" to 10-1/8" (235 to 257)	18½" (470)	32" (813)	40" (1013)	900	7.5	125 (56.9 kg)
6211	10-1/4" to 11" (235 to 279)	18½" (470)	32" (813)	40" (1013)	900	7.5	138 (62.6 kg)
6212	11-1/4" to 12-1/4" (260 to 311)	20¾" (527)	36½" (927)	40" (1013)	900	7.5	138 (62.6 kg)

Three Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical		Ship Weight
		W	L	H	Watts	Amps	
6300	Up to 5" (127)	18½" (470)	46½" (1178)	40" (1013)	900	7.5	171 (77.4 kg)
6305	5-1/8" to 5-3/4" (130 to 146)	18½" (470)	46½" (1178)	40" (1013)	900	7.5	171 (77.4 kg)
6306	5-7/8" to 6-1/2" (149 to 165)	18½" (470)	46½" (1178)	40" (1013)	900	7.5	176 (80.0 kg)
6307	6-5/8" to 7-1/4" (168 to 184)	18½" (470)	46½" (1178)	40" (1013)	900	7.5	180 (81.8 kg)
6308	7-3/8" to 8-1/8" (187 to 206)	18½" (470)	46½" (1178)	40" (1013)	900	7.5	192 (87.3 kg)
6309	8-1/4" to 9-1/8" (210 to 232)	18½" (470)	46½" (1178)	40" (1013)	1350	11.3	169 (89.1 kg)
6310	9-1/4" to 10-1/8" (235 to 257)	18½" (470)	46½" (1178)	40" (1013)	1350	11.3	200 (90.9 kg)

Four Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical		Ship Weight
		W	L	H	Watts	Amps	
6400	Up to 5" (127)	32" (813)	32" (813)	40" (1013)	1200	10.0	188 (85.4 kg)
6405	5-1/8" to 5-3/4" (130 to 146)	32" (813)	32" (813)	40" (1013)	1200	10.0	188 (85.4 kg)
6406	5-7/8" to 6-1/2" (149 to 165)	32" (813)	32" (813)	40" (1013)	1200	10.0	192 (87.3 kg)
6407	6-5/8" to 7-1/4" (168 to 184)	32" (813)	32" (813)	40" (1013)	1200	10.0	193 (87.4 kg)
6408	7-3/8" to 8-1/8" (187 to 206)	32" (813)	32" (813)	40" (1013)	1200	10.1	220 (100.0 kg)
6409	8-1/4" to 9-1/8" (210 to 232)	32" (813)	32" (813)	40" (1013)	1800	15.0	222 (100.1 kg)
6410	9-1/4" to 10-1/8" (235 to 257)	32" (813)	32" (813)	40" (1013)	1800	15.0	225 (102.3 kg)

Options

- Perimeter bumper
- 208/240 VAC 60HZ
- 220 VAC 50HZ
- Stainless steel dish covers
- Push handle, vertical one-piece (not available on four stack models)

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
 800-558-8565 • 414-902-6400 • Fax 414-902-6446
 info@eLakeside.com • www.eLakeside.com/foodservice