

Hi-Boy Whirlpools

Division of Acorn Engineering Company











H Series 105 Gallon Stationary Whirlpool

WHH-105-S



WHH-105-S

Whitehall WHH-105-S Stationary Whirlpool

Tank Capacity is 105 gallons.

Whirlpool Tank is 48"L x 24"W x 28"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Tank rim is reinforced with a concealed stainless steel rod. Tank bottom is seamless, coved (rounded) design for effective cleaning. Tank is also provided with an extended stainless steel skirt flush to the floor line to conceal internal drain piping. A 2" Combination Drain Overflow and a Filler Spout are provided.

Turbine Raising and Lowering Device permits adjustment of desired height and direction of water agitation towards the area of the body during Whirlpool use. It is spring balanced and provided with a locking device.

Turbine Assembly is equipped with Underwriters Laboratory listed 1/2 HP jet pump motor protected with an ABS plastic shell, automatic thermal overload protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze.

Thermometer is provided with a dual scale, adjustable calibration, and a stem inserts into a retainer to prevent rattle during whirlpool agitation.

GUIDE SPECIFICATIONS

Provide Whitehall Stationary Whirlpool (specify model number and options) with a 105-gallon capacity, 48"L x 24"W x 28"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Tank shall have a reinforced rim and shall be fitted with a stainless steel skirt flush to the floor line. Bottom of tank shall be a seamless, rounded coved design. Provide a 2" combination drain and overflow, and a filler spout. Provide a turbine assembly with raising and lowering device which functions as an agitator and permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP jet pump motor with automatic thermal overload protector and lifetime-sealed bearings. Provide a thermometer with a stem retainer to prevent rattle when whirlpool is in operation.

Please visit www.whitehallmfg.com for most current specifications.





Hi-Boy Whirlpools

MODEL NUMBER AND OPTION SELECTIONS

Series

☑ WHH Hi-Boy Series

Capacity

₫ -105 Gallons

Type

✓ -S Stationary Whirlpool

Turbine Electrical Requirements

□ 115VAC / 50Hz□ 115VAC / 60HZ□ 230VAC / 50Hz□ 230VAC / 60HZ

Country of Use _____

For Mixing Valve:

Refer to supplemental MXT15-OTG and DU-1 sheet for details.

Suffix Options (See Whirlpool Options Section for Details)

- ☐ -AS2 Adjustable Suspension Seat
- ☐ -CTS2 Combination Table with Seats
- ☐ -EG Enviro-Glaze® Color Powder Coating -

Specify Color:

https://www.whitehallmfg.com/enviro-glaze


☐ -GFI Ground Fault Interrupter


-LOGO Applied Logos: Team, Facility, Company

Logo

-SDO Separate Drain and Overflow Assembly

☐ -TTS2 Tank Top Seat



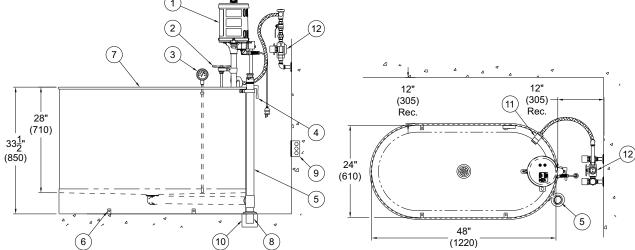

STATIONARY WHH-105-S SERIES WHIRLPOOL

NOTES:

- 1. 1/2 HP Jet Pump Motor
- 2. Variable Pressure Control
- 3. Thermometer
- 4. Turbine Raising & Lowering Device
- 5. Combination Drain & Overflow Assembly
- 6. "L" Brackets (4) Four Each
- 7. Stainless Steel Tank
- 8. 2" O.D. x 5" Tailpiece
- 9. 3 Pole GFI Receptacle by Others
- 10. Floor Drain by Others
- 11. Filler Spout
- 12. Mixing Valve, Shown For Reference Only

All dimensions are nominal and subject to manufacturer's change without notice.

Whitehall assumes no responsibility fo use of void or superseded data @ Whitehall
Manufacturing, Member of Morris Group
International.

Please visit **www.whitehallmfg.com** for most current specifications.

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING		
Model Number & Options		Quantity
Company		Date
Contact	Title	
Approval for Manufacturing/Signature		