accuc@ld

ARG15PVLOCKER



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright glass door commercial all-refrigerator with lockers for the display and refrigeration of vaccines, with antimicrobial silver-ion handle and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs	
Commercial design	Meets UL-471 commercial standards	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment	




accuc@ld

ARG15PVLOCKER Specifications:

Overview				
Nominal Height	72.0" (183 cm)			
Height of Cabinet	72.0" (183 cm)			
Nominal Width	24.0" (61 cm)			
Width	23.38" (59 cm)			
Width with Door Open	23.88" (61 cm)			
Nominal Depth	25.0" (64 cm)			
Depth	24.38" (62 cm)			
Depth with Handle	26.13" (66 cm)			
Depth with door at 90°	46.5" (118 cm)			
Capacity	15.0 cu.ft. (425 L)			
Defrost Type	Automatic			
Door	Glass			
Cabinet	White			
US Electrical Safety	ETL			
Canadian Electrical Safety	ETL-C			
Amps	1.4			
Voltage/Frequency	115 V AC/60 Hz			
Weight	240.0 lbs. (109 kg)			
Parts & Labor Warranty	2 Years			
Compressor Warranty	5 Years			
UPC	761101074962			
Refrigerator Features				
Door Swing	RHD			
Reversible	Yes			
Shelf Type	Lockers			
Shelf Qty	8			
Thermostat Type	Digital			
Fan Type	Interior			
Refrigerant Type	R600a			
Refrigerant Amount	2.65oz.			
Interior Light	Yes			
Temperature Range	2 to 8°C			
Sound Level	41.8 dB			
Souria Level	Dimensions			
	63.25" (161 cm)			
Dimensions	63.25" (161 cm) 20.0" (51 cm)			

Compressor Step Height	6.5" (17 cm)
Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	5.0" (13 cm)

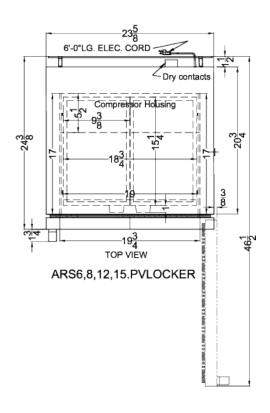

accuc@ld

